

UNITY PRIME VG

Unity Forest Products, Inc.

www.unityforest.com



STORAGE & INSTALLATION

START WITH THE BEST AND YOUR FINISH WILL STAND OUT!

*Failure to follow proper installation & finish practices will negate the product Warranty.

DO:


- Prime all cut ends.
- Use stainless steel, high tensile strength aluminum, or hot dipped galvanized nails.
- Fill all nail holes.
- Follow local building code requirements.
- Use only top quality finishes and follow their application instructions.
- Apply a minimum of 2 coats un-thinned acrylic latex exterior finish immediately after installation.

DO NOT:

- Do not use for structural purposes.
- Do not store in direct contact with the ground or concrete.
- Do not use for decking or railing.
- Do not nail through overlapping pieces.



All siding may pick up or lose moisture in transit or storage so it is important to allow it to acclimate with surrounding air of its final site prior to installation. If stacked over concrete, allow 3-1/2" above the surface of the concrete. If the unit is over wet ground or wet concrete, lay down a vapor barrier so the unit does not pick up moisture from beneath the stack.

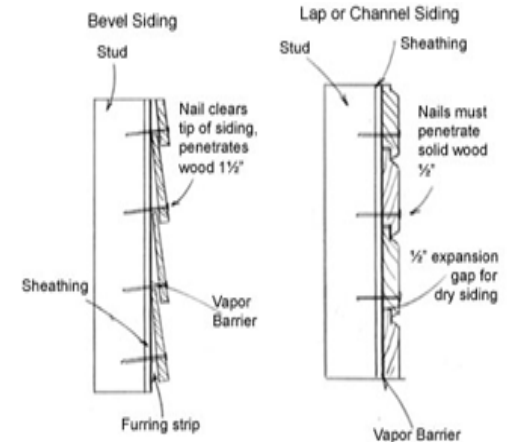

For Warranty information go to
www.unityforest.com (Resource Tab)

UNITY PRIME VG WARRANTY